

SPR Mill Drill

OVERCURRENT PROTECTION-

POWERFUL 3HP ELECTRIC
REVERSIBLE MOTOR WITH
FOUR VARIABLE SPEED
(80/130/360/570 RPM)
WITH 203 FT/LBS OF TORQUE

ANNULAR DRILLING UP TO 6.5" [165mm]
AND SINGLE POINT BORING UP TO 12" [305mm]

DESIGNED FOR HEAVY
ENGINEERING AND FABRICATION,
SHIPBUILDING AND PRODUCTION
ENGINEERING ENVIRONMENTS


OPTIONAL POWER FEED, FACING SET-UP AS WELL AS PNEUMATIC AND HYDRAULIC DRIVE UNITS AVAILABLE

> [–]14.5" [368mm] OF DRILLING/BORING TRAVEL

Z-AXIS ADJUSTABLE WITH RACK AND PINION OR ACME LEADSCREW

MICRO ADJUSTABLE MODULAR
BASE PLATE WITH OPTIONS FOR X-Y
ADJUSTABLE, MAGNETIC OR
CUSTOM BASES

PELICAN ROLLER CASE FOR EASY TRANSPORT

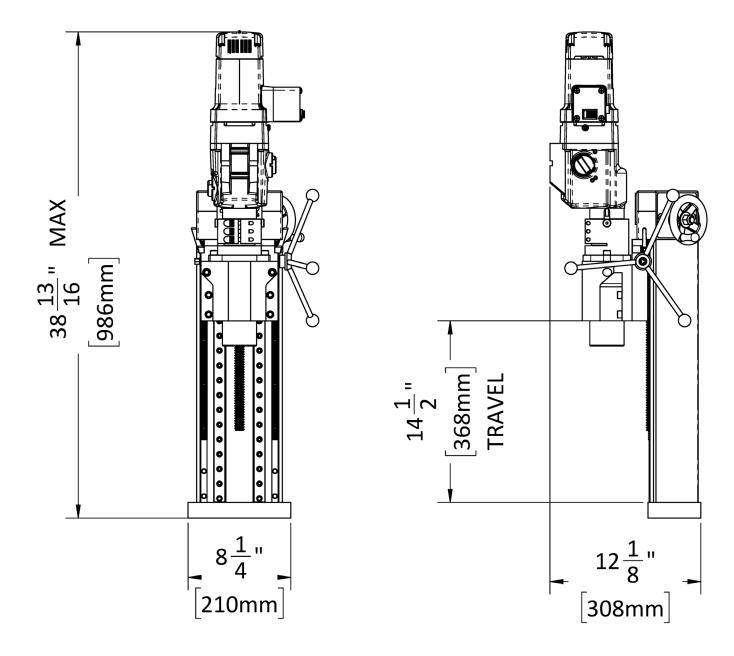

833.447.3777 info@sprtool.com sprtool.com





