





Steel Outside Diameter Flange Facer (ODFF)

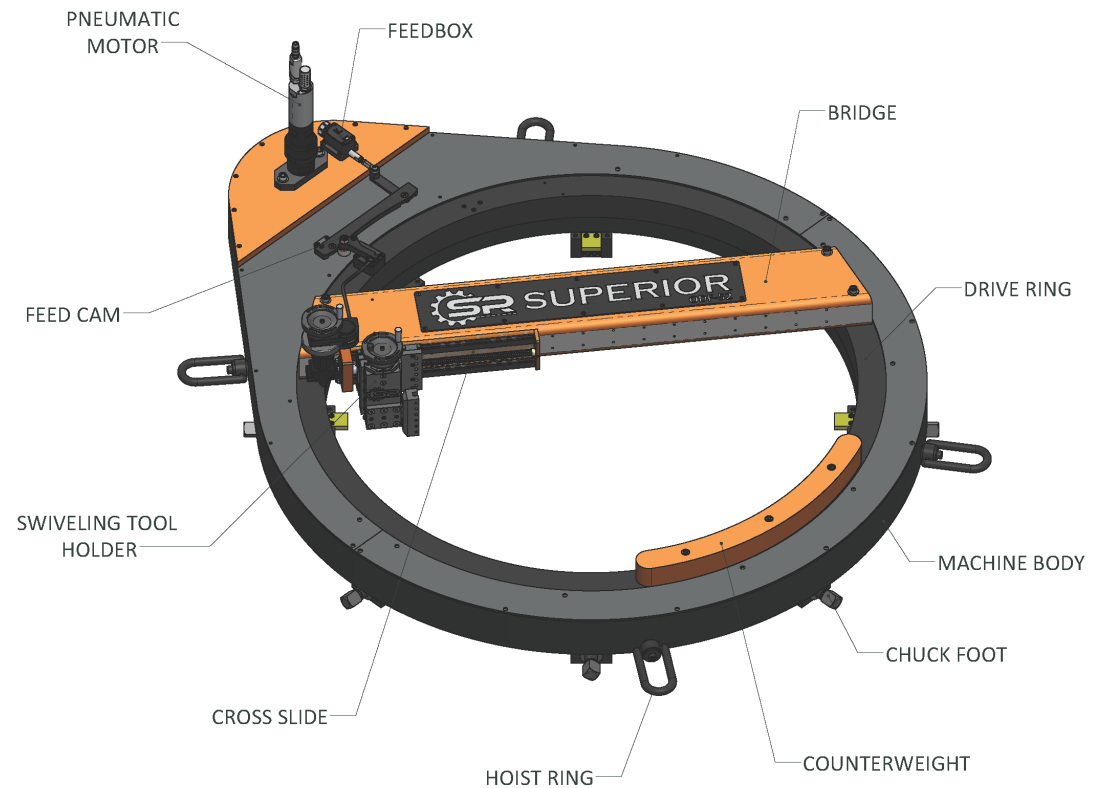

SPECIFICATIONS CHART

Steel FF	A	B	C	D	E	F	G	H
SFF 21"	21.125" (536.575 mm)	34.5" (876.3 mm)	41.5" (1054.1 mm)	4.375" (111.125 mm)	5" (127 mm)	20" (508 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 30"	30" (762 mm)	43.375" (1101.725 mm)	57" (1447.8 mm)	5.25" (133.35 mm)	5.75" (146 mm)	20" (508 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 32"	32.125" (815.975 mm)	45.125" (1146.175 mm)	67.25" (1708.15 mm)	5.25" (133.35 mm)	5.75" (146 mm)	20.75" (527 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 40"	40" (1016 mm)	54.625" (1387.475 mm)	67.25" (1708.15 mm)	5.25" (133.35 mm)	5.75" (146 mm)	20.75" (527 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 42"	42.125" (1069.975 mm)	54.625" (1387.475 mm)	67.25" (1708.15 mm)	5.25" (133.35 mm)	5.75" (146 mm)	20.75" (527 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 52"	52.125" (1323.975 mm)	66.75" (1695.45 mm)	79.5" (2019.3 mm)	5.25" (133.35 mm)	6.25" (158.75 mm)	21.25" (539.75 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 62"	62.125" (1577.975 mm)	75.25" (1911.35 mm)	88.25" (2241.55 mm)	5.25" (133.35 mm)	6.25" (158.75 mm)	21.25" (539.75 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 72"	72.125" (1831.975 mm)	83.375" (2117.725 mm)	97" (2463.8 mm)	5.25" (133.35 mm)	6.25" (158.75 mm)	21.25" (539.75 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 82"	82.125" (2085.975 mm)	95.25" (2419.35 mm)	108.25" (2749.55 mm)	5.25" (133.35 mm)	6.25" (158.75 mm)	21.25" (539.75 mm)	3.5" (88.9 mm)	13.5" (342.9 mm)
SFF 102"	102.125" (2593.975 mm)	115.625" (2936.875 mm)	128.75" (3270.25 mm)	5.5" (139.7 mm)	6.5" (165.1 mm)	21.75" (552.45 mm)	3.5" (88.9 mm)	14" (355.6 mm)

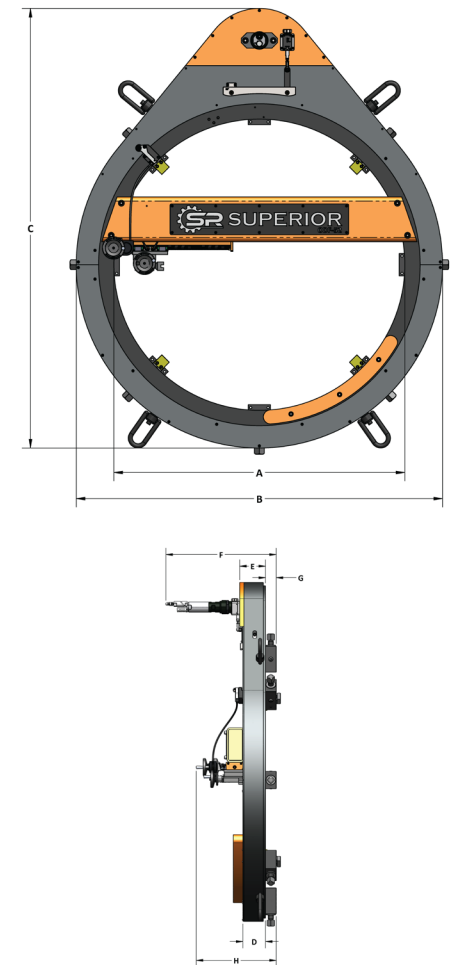

Superior's Steel O.D. Mount Flange Facing Machines are designed to handle a wide range of applications while keeping operator efficiency front and center. Each unit is thoughtfully engineered and packaged for easy setup, smooth operation, and reliable results in the field. With a pneumatic drive, belt-driven power, and precision ball rail design, these machines deliver accurate, consistent travel and can swivel to any angle for machining all gasket surface types. The built-in Hands-Free Automatic Feed takes productivity even further — advancing at a steady pace with the push of a lever, it produces a flawless finish while reducing operator effort and downtime. The result is a safer, faster, and more efficient way to achieve precision flange facing, every time.

YORK • SUPERIOR • CLIFF'S BITS • SUPERIOR HEAT EXCHANGERS • YORK MACHINE SHOP

PORTABLE MACHINE TOOLS P L A N T R E N T A L S P R E C I S I O N G R I N D I N G & T O O L I N G P O R T A B L E T O O L S A N D M A C H I N E R Y C U S T O M M A C H I N I N G , M A N U F A C T U R I N G , A N D R E P A I R S

833.447.3777

info@sprtool.com

sprtool.com

Follow us on social media:

